


CFD-10

Intel® Coffee Lake(FCLGA1151) Processor based Mini ITX Motherboard with H310 Chipset

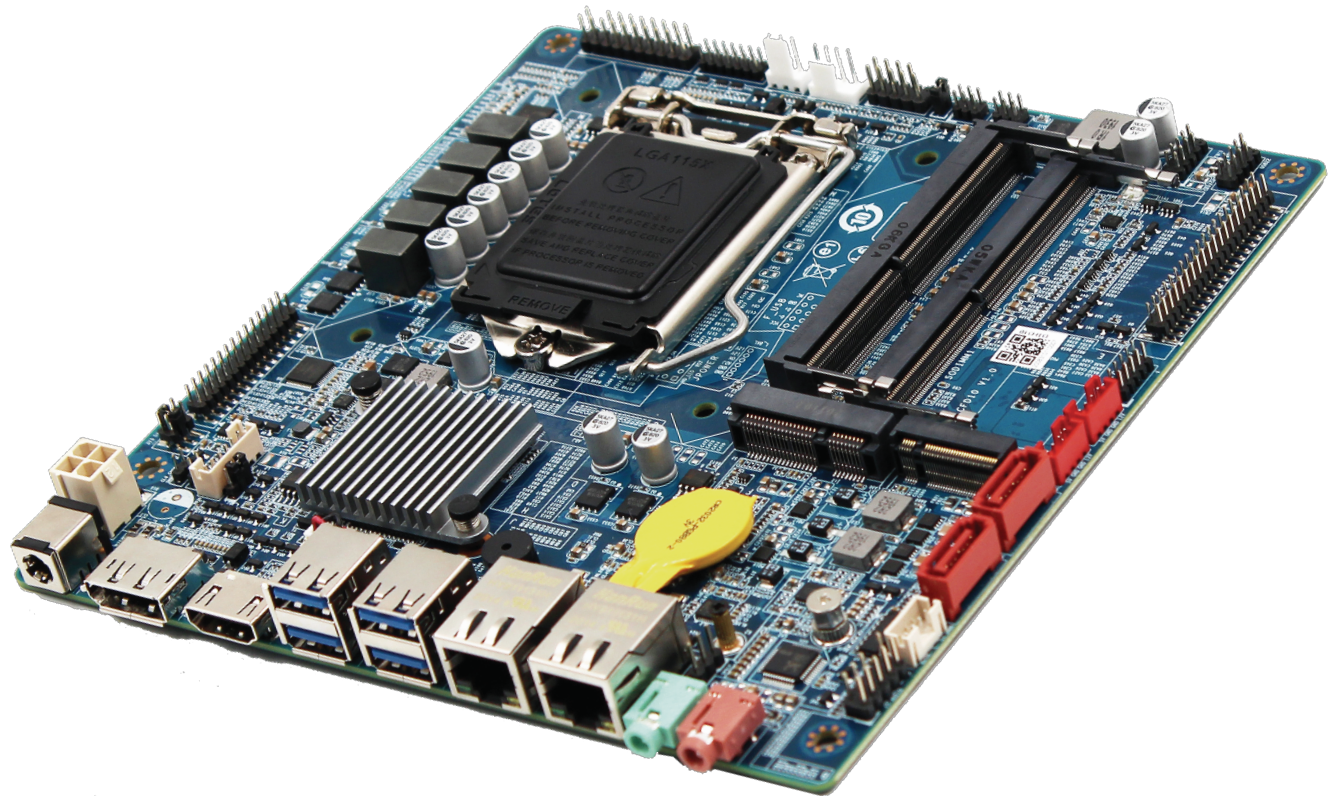

Features

- CPU: Intel Coffee Lake LGA1151 Processor
- Memory: Dual Channel SO-DIMM DDR4 up to 64 GB
- Display: Intel Integrated Graphics via HDMI, DP, LVDS/eDP
- Ethernet: 10/100/1000 Mbps
- Storage: SATA3.0, M.2 for 2242 SSD
- Expansion: mini PCIe, SIM Card Slot
- Power: 19V DC input



IoT Solutions
Alliance
Industrial Solution
Builders Specialist

Maxtang[®]

MAXIMIZING YOUR COMPUTING PRODUCTIVITY

Introduction

The Maxtang mini-ITX CFD10 is an embedded motherboard, based on Intel Tiger Lake-U and provides a complete PC platform with high performance. Multiple displays are supported in addition to dual-channel SO-DIMM DDR4 memory. Features with 1-Gigabit Ethernet controllers, M.2 for SSD modules, 2x SATA3.0. Optional TPM module for added security.

The CFD10 is an ideal solution for various applications like mini-server, high-resolution display products, electronic gaming machines, medical imaging, interactive digital signage, thin clients, or PDS terminals. A rich interface as 4 x USB2.0, 4 x USB3.2, 1x Mic-in, 1x Line-out and 2x LAN, catering to most market's requirement.



H/W Monitor



Watchdog




GPIO



Brightness

I/O Interfaces

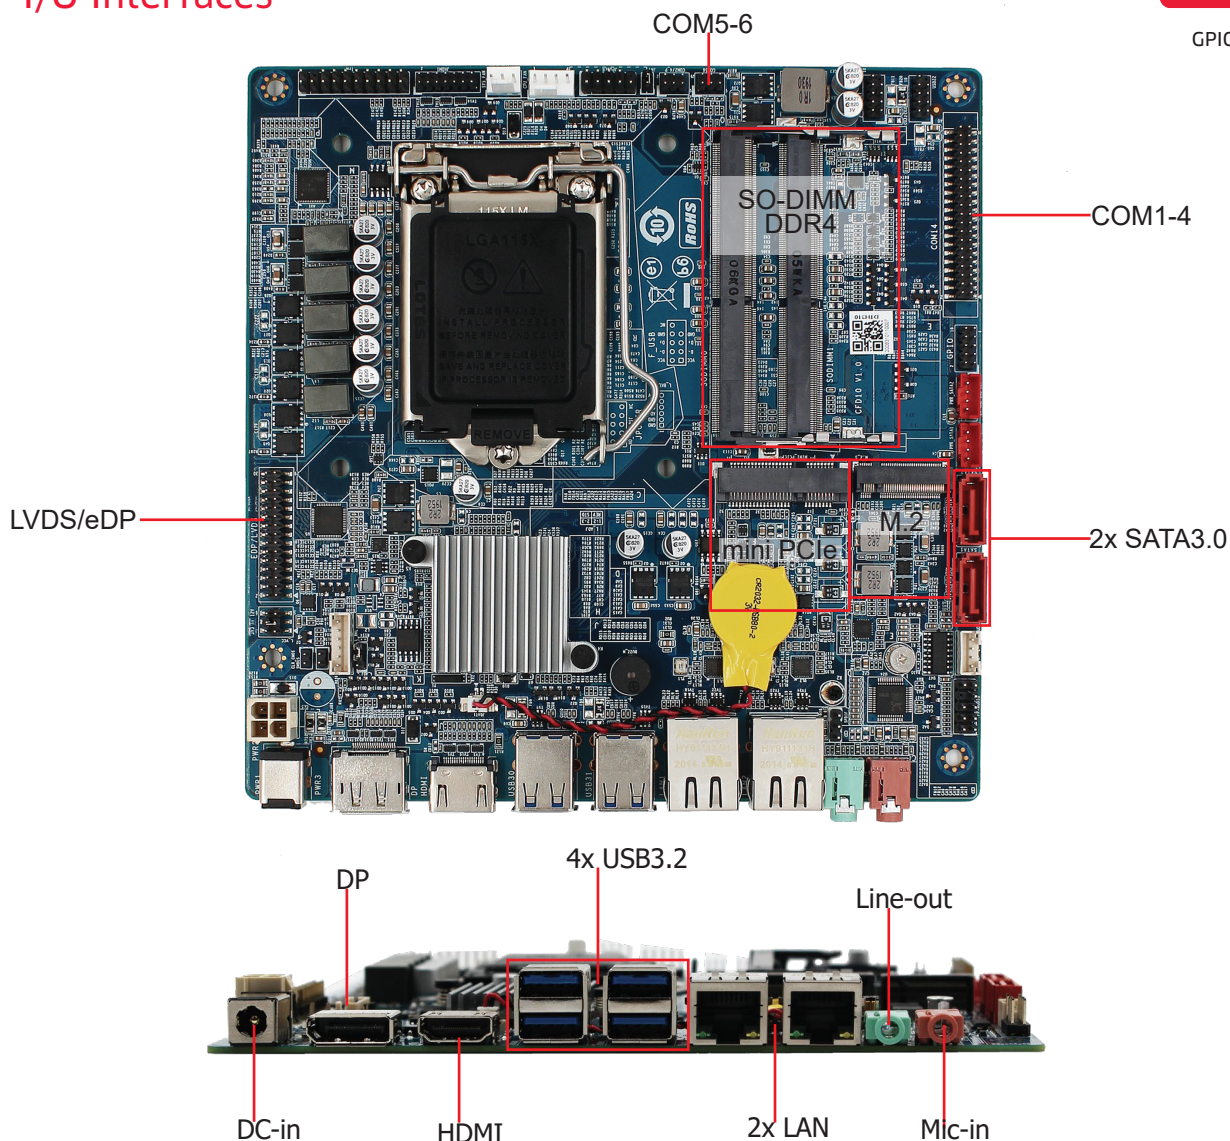


Technical Specifications

Processor	CPU	Intel Coffee Lake 8th, 9th Gen Processors (FCLGA1151)
	Chipset	H310
	BIOS	AMI UEFI BIOS
Memory	Type	Dual Channel SO-DIMM DDR4
	Max. Capacity	64 GB
Display	GPU	Integrated Graphics
	Display via	1x HDMI +1x HDMI(Pins)+1x DP+1x LVD /eDP
Ethernet	Speed	10/100/1000 Mbps
	Controller	Realtek RTL8111H
	Interface	RJ-45
	Wake on LAN	Yes
Audio	Audio Codec	Realtek HD
	Interface	Mic-in, Line-out, Audio header, amplifier header
Hardware		CPU System temperature, onboard voltage, watchdog
Storage	M.2	1x M.2 for 2242 SSD,
	SATA3.0	2
Expansion	PCIe	1x mini PCIe
	SIM	1x SIM Card Slot
I/O Interface	LAN	2
	COM	4x RS232 + 2x RS485 (header)
	USB 2.0	4* header
	USB 3.2	4
	Audio	1x Line-out+ 1x Mic-in
	DC-in	1
	GPIO	8
	TPM2.0	Onboard Optional
Dimension	Size	170mm x 170mm
	Board Type	Mini ITX
Power	Standard Port	19V DC-in
	Peripheral Input	For Fan and SATA
Temperature	Operating Temp.	-20°C to 60°C
	Storage Temp.	-20°C to 60°C
Operating System		Windows 10 64 bit, Linux 64 bit

* All specifications and photos are subject to change without notice.

Connector Diagram

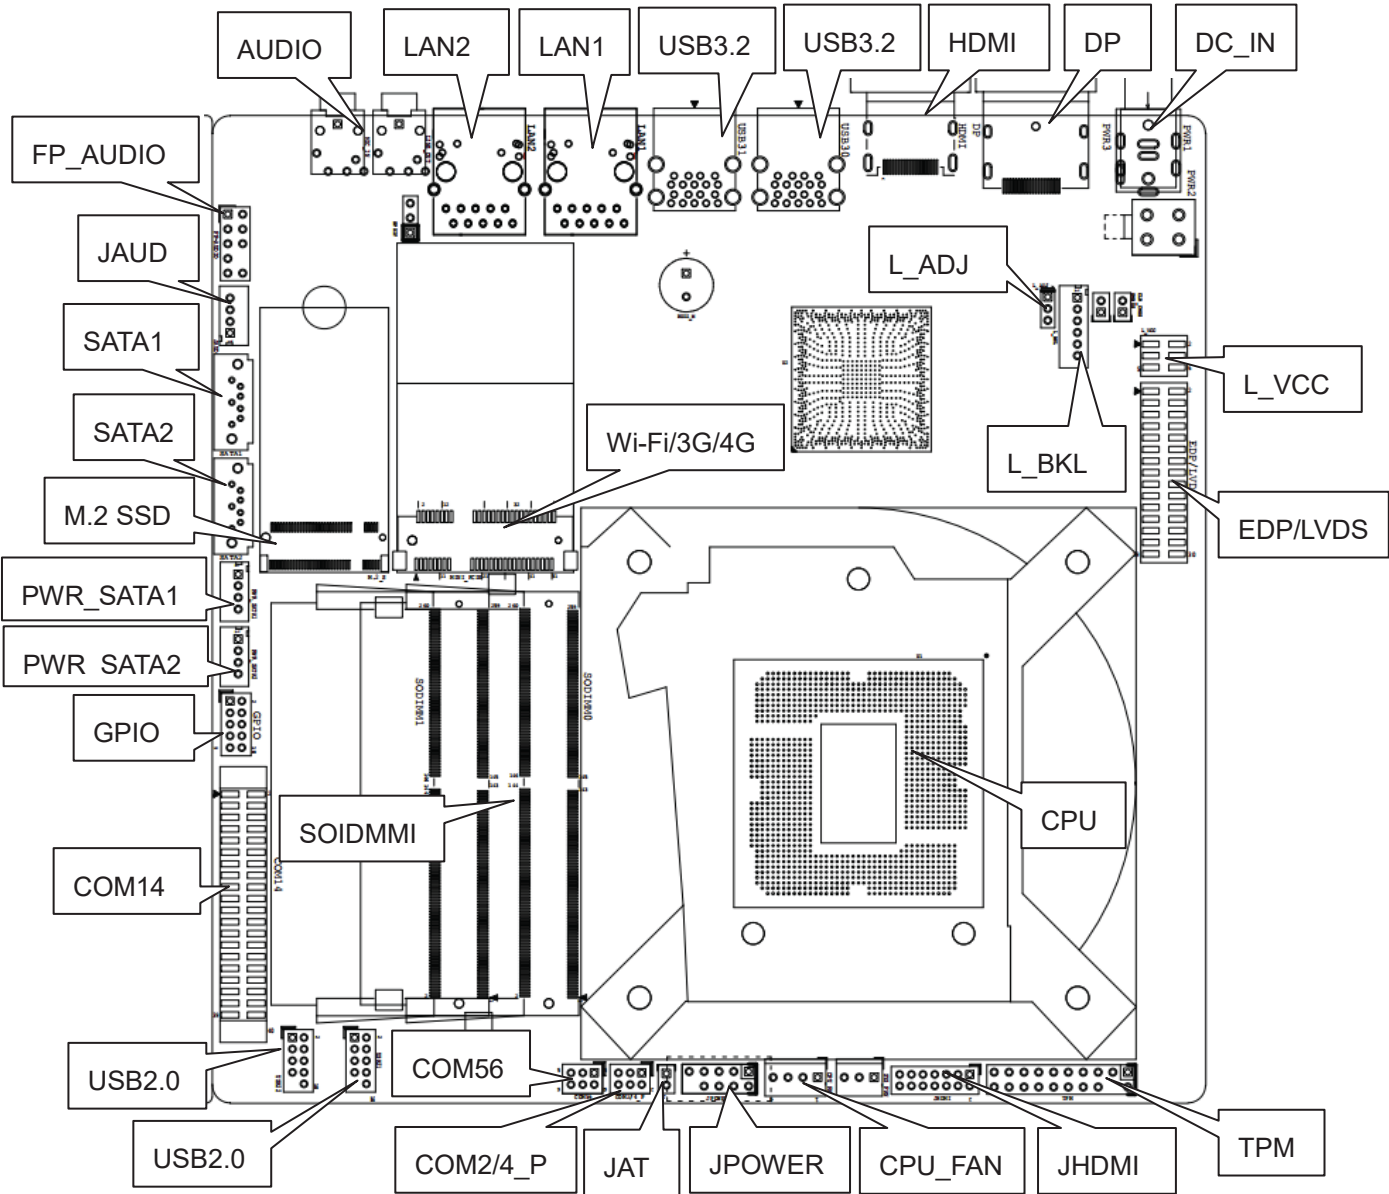

Copyright © 2018 Maxtang Technology Co. Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized.